



1943-2022
XCMG 79 年

XCMG


TOPLESS TOWER CRANE 平头式塔机

XGT6013B-6S1



外形尺寸


Dimensions

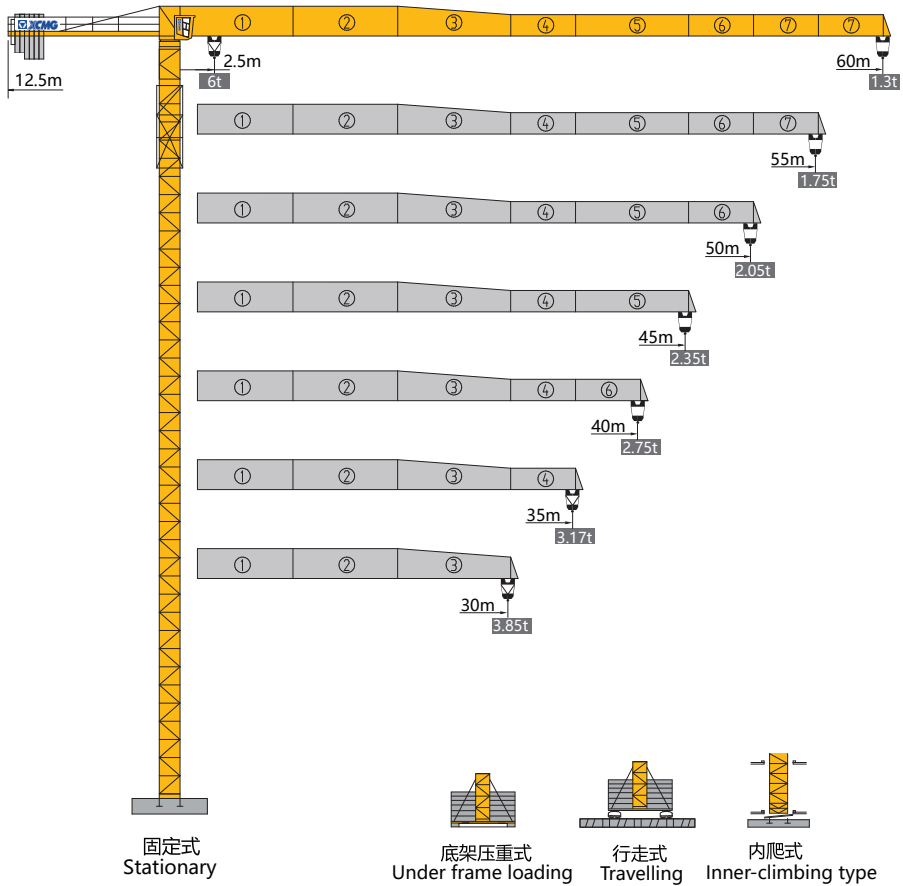

★ 可变换的其他安装方式与我们协商 Mounting possibilities Consult us.

塔身与反力


Masts and Reactions

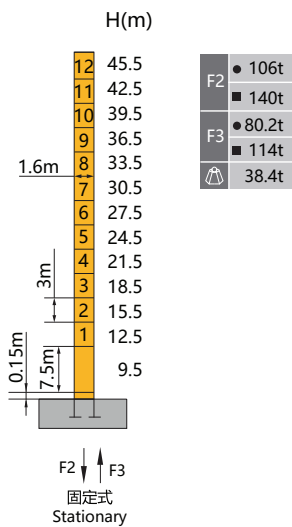

H(m) 吊钩高度 Height of the hook ● 工作状态反力 Reactions in service ■ 非工作状态反力 Reactions out of service
⚖ 独立高度最大臂长的自重 (不含平衡重, 不含压重)
Weight with max free standing, max jib (without counter-jib ballast and load)

附着

Anchorage

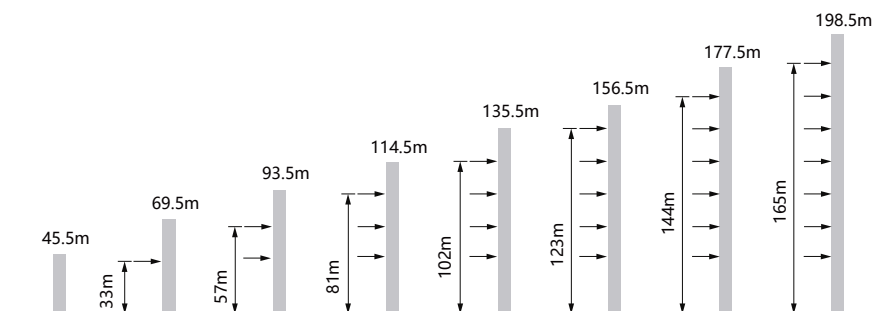

★ 如需其他的高度, 请与我们联系。 For other heights, consult us please.

起重特性

Load Diagrams

起重臂 jib R(m)	α	R _{min} m	R(C _{max}) m	C _{max} kg	幅度 (m) / 起重重量 (kg)						Range(m) / Loading (kg)					
					10	15	20	25	30	35	40	45	50	55	60	
60		2.5	32.86	3000	3000						2775	2345	2012	1746	1530	1350
		2.5	18.15	6000	6000	5357	4115	3298	2721	2290	1957	1692	1475	1295		
55		2.5	36.18	3000	3000						2649	2282	1989	1750		
		2.5	19.94	6000	6000	5979	4608	3707	3069	2594	2227	1934	1695			
50		2.5	37.02	3000	3000						2726	2350	2050			
		2.5	20.39	6000	6000		4733	3810	3157	2671	2295	1995				
45		2.5	37.28	3000	3000						2726	2350				
		2.5	20.39	6000	6000		4733	3811	3158	2672	2295					
40		2.5	37.28	3000	3000						2750					
		2.5	20.53	6000	6000	6932	4772	3842	3185	2695						
35		2.5	35.00	3000	3000											
		2.5	20.46	6000	6000		4751	3825	3170							
30		2.5	30.00	3000	3000											
		2.5	20.57	6000	6000		4781	3850								

配重配置

Counter-jib Ballast

配重配置 Counter-jib Ballast			2650-2300-1200			
(m)	(m)	(kg)	PZ2650	PZ2300	PZ1200	
60	12.5	16400	4	2	1	
55	12.5	16400	4	2	1	
50	12.5	15200	4	2	0	
45	12.5	14100	4	1	1	
40	12.5	12550	3	2	0	
35	12.5	11450	3	1	1	
30	12.5	10250	3	1	0	

传动机构

Mechanisms

传动机构 Mechanisms	图例 Legend	型号 Model	速度 (m/min) Speed	起重重量 (t) Hoist Weight	容绳量(m) Rope Capacity	功率(kW) Power	
起升 Hoisting		22LVF15A		0-40	3	420 >420 *	22
				0-70	1.5		
				0-100	0.8		
				0-20	6		
				0-35	3		
				0-50	1.6		
变幅 Trolleying		3DVF3	0-50m/min			3	
回转 Slewing		8RVF	0-0.6r/min			2×4	
行走 Travelling		RT	0-24m/min			2×5.2	
电源 Main Supply					~380V (±10%) 50Hz		
总功率 (不含顶升和行走) Gross Power (Excluding climbing and travelling)					33kW		

★ 如需其他配置，请与我们联系。 For other configuration, consult us please.

此样本所列技术参数不受法律约束，具体请详见相应产品说明书。

These brochure of specifications and data are not legally binding,specific instructions please based on our product manuals.